

TECHNICAL DATA

# ABB i-bus® KNX

## SAH/S 8.16.7.1

### Switch/Shutter Acuator



—  
**Product description**

The Switch/Shutter Actuator is a modular installation device in proM design. The device is designed for installation in electrical distribution boards and small housings for rapid mounting on a 35-mm mounting rail (to EN 60715).

The device possesses mutually independent switching relays with which the following functions can be implemented:


- Switching electric consumers (individually)
- Activation of 230 V AC blind and shutter drives (in pairs)

The device does not possess any mutually electromechanically interlocked output contacts.

The device is provided with bus voltage via the ABB i-bus® KNX. The connection to the ABB i-bus® KNX is implemented using the bus connection terminal. The consumers are connected at the outputs using screw terminals (terminal designation on the housing).


*Manual operation* mode permits on-site operation of the device using a membrane keypad.

—  
**Dimension drawing**

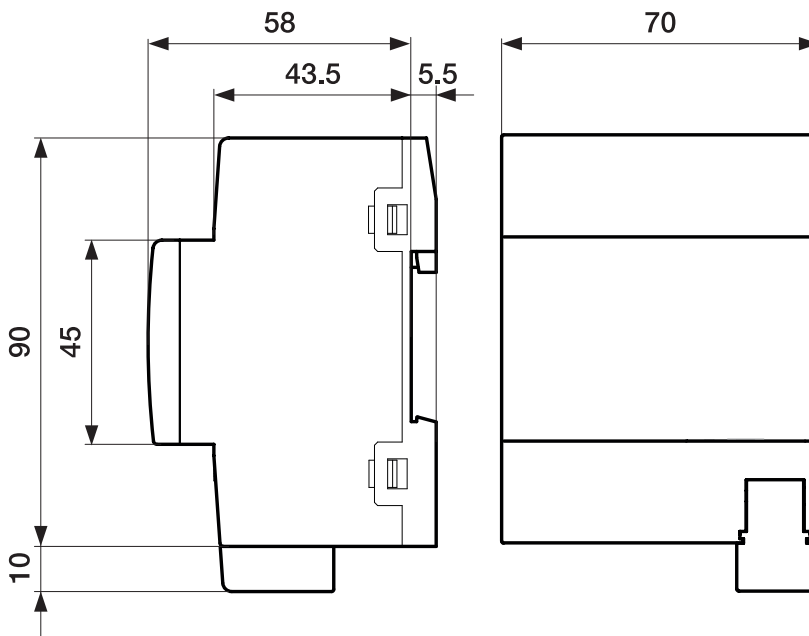

2CDC072033F0015

—  
**Connection diagram**

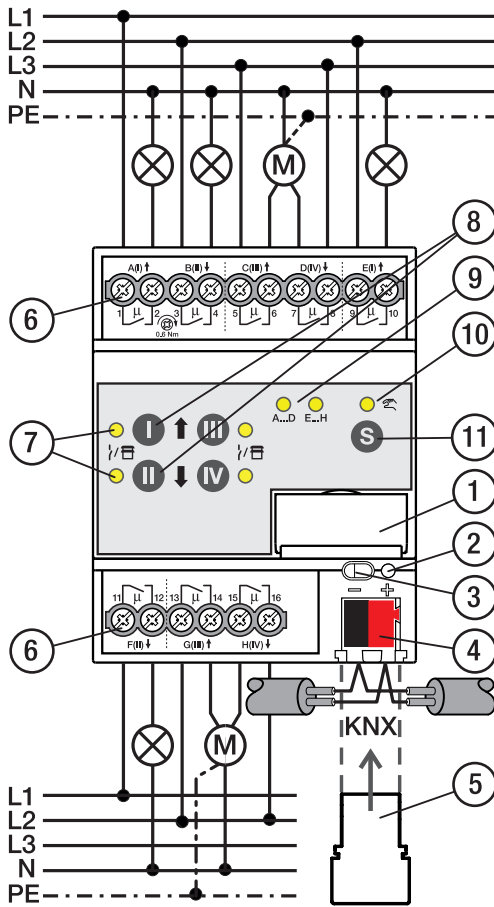

—  
**Legend**

- |  |  |
|--|--|
| 1 Label carriers                         | 7 Output status LED (yellow)                   |
| 2 Programming LED                        | 8 Output button                                |
| 3 Programming button                     | 9 Groups LED (yellow)                          |
| 4 Bus connection terminal                | 10 Manual operation LED (yellow)               |
| 5 Cover cap                              | 11 S button (manual operation / select output) |
| 6 Load circuit, two screw terminals each |  |

—  
General technical data

<b>Supply</b>	Bus voltage	21 ... 32 V DC	
	Current consumption, bus	< 12 mA	
	Power loss, bus	Max. 250 mW	
	Power loss, device	4.0 W	
<b>Connections</b>	KNX	Ø 0.8 mm single core (via bus connection terminal)	
<b>Connection terminals</b>	Screw terminal	Screw terminal with universal head (PZ 1) 0.2 ... 4 mm <sup>2</sup> stranded, 2 × (0.2 ... 2.5 mm <sup>2</sup> ) 0.2 ... 6 mm <sup>2</sup> single core, 2 × (0.2 ... 4 mm <sup>2</sup> )	
	Ferrule without plastic sleeve	0.25 ... 2.5 mm <sup>2</sup>	
	Ferrule with plastic sleeve	0.25 ... 4 mm <sup>2</sup>	
	TWIN ferrules	0.5 ... 2.5 mm <sup>2</sup>	
	Ferrule contact pin length	Min. 10 mm	
	Tightening torque	Max. 0.6 Nm	
	<b>Degree of protection and protection class</b>	Degree of protection	IP 20 to EN 60529
		Protection class	II to EN 61140
<b>Isolation category</b>	Overvoltage category	III to EN 60664-1	
	Pollution degree	II to EN 60664-1	
	Fire classification	Flammability V-0 as per UL94	
	<b>SELV</b>	KNX safety extra low voltage	SELV 24 V DC
<b>Temperature range</b>	Operation	-5 ... +45 °C	
	Transport	-25 ... +70 °C	
	Storage	-25 ... +55 °C	
<b>Ambient conditions</b>	Maximum air humidity	95 %, no condensation allowed	
<b>Design</b>	Modular installation device (MDRC)	Modular installation device	
	Design	proM	
	Housing/color	Plastic, gray	
<b>Dimensions</b>	Dimensions	90 × 70 × 63.5 mm (H × W × D)	
	Mounting width in space units	4 modules	
	Mounting depth	63.5 mm	
<b>Mounting</b>	35 mm mounting rail	To EN 60715	
	Mounting position	Any	
	Weight (net)	0.272 kg	
<b>Approvals</b>	KNX certification	To EN 50090-1, -2	
	CE marking	In accordance with the EMC and Low Voltage Directives	

—  
Device type

<b>Device type</b>	Switch/Shutter Actuator	SAH/S 8.16.7.1
	Application	Switch/Shutter 8f 16 A / ... ... = current version number of the application
	Maximum number of group objects	282
	Maximum number of group addresses	1,000
	Maximum number of assignments	1,000

**i Note**  
Observe software information on the website → [www.abb.com/knx](http://www.abb.com/knx).

**i Note**  
The device supports the locking function of a KNX device in ETS. If a BCU code was assigned, the device can be read and programmed only with this BCU code.

—  
**Output, rated current 16 A**

<b>Rated values</b>	Number of outputs	8 switch / 4 shutter
	U <sub>n</sub> Rated voltage	230 V AC (50/60 Hz)
	I <sub>n</sub> Rated current	16 A
	Maximum current per device	100 A
<b>Switching currents</b>	AC3 operation (cos φ= 0.45) to EN 60947-4-1	6 A / 230 V AC
	AC1 operation (cos φ= 0.8) to EN 60947-4-1	16 A / 230 V AC
	Fluorescent lighting load according to EN 60669-1	
	minimum switching current at 12 V AC	100 mA
	minimum switching current at 24 V AC	100 mA
<b>Service life</b>	DC switching capacity, resistive load, at 24 V DC	6 A
	Mechanical service life	> 10 <sup>6</sup> cycles
	Electrical endurance of switching contacts according to IEC 60 947-4-1:	
	AC1 (240 V/cos φ=0.8)	> 10 <sup>5</sup> cycles
	AC3 (240 V/cos φ=0.45)	> 6 × 10 <sup>3</sup> cycles
<b>Switching times</b>	AC5a (240 V/cos φ=0.45)	
	Maximum output relay position changes per minute if all relays are switched.	15
	Maximum output relay position changes per minute if only one relay is switched.	120

**Note**

The switching times apply only after the bus voltage has been applied to the device for at least 30 seconds. The typical relay delay is approx. 20 ms.

—  
**Output, lamp load 16 A**

<b>Lamps</b>	Incandescent lamp load	1,200 W
<b>Fluorescent lamps</b>	Uncompensated	800 W
	Parallel compensated	
	DUO circuit	
<b>Low-voltage halogen lamps</b>	Inductive transformer	800 W
	Electronic transformer	1,000 W
	Halogen 230 V	1,000 W
<b>Dulux lamp</b>	Uncompensated	
	Parallel compensated	
<b>Mercury-vapor lamp</b>	Uncompensated	1,000 W
	Parallel compensated	800 W
<b>Switching capacity (switching contact)</b>	Maximum peak inrush current I <sub>p</sub> (150 ms)	200 A
	Maximum peak inrush current I <sub>p</sub> (250 ms)	160 A
	Maximum peak inrush current I <sub>p</sub> (600 ms)	100 A
<b>Number of ballasts (T5/T8, single element)</b>	18 W (ABB ballast 1 x 18 SF)	10
	24 W (ABB ballast T5 1 x 24 CY)	10
	36 W (ABB ballast 1 x 36 CF)	7
	58 W (ABB ballast 1 x 58 CF)	5
	80 W (Helvar EL 1 x 80 SC)	3
<b>Energy-saving lamps</b>	LED lamps	250 W
<b>Rated motor power</b>		1,380 W

**Note**

The device features independent switching relays that are linked by software to control the shutters. The contacts are not mutually electromechanically interlocked.

—  
**Ordering details**

Description	MB	Type	Order no.	Packaging unit [pcs.]	Weight 1 pc. (gross) [kg]
Switch/Shutter	4	SAH/S 8.16.7.1	2CDG 110 250 R0011	1	0.272



---

**ABB STOTZ-KONTAKT GmbH**

Eppelheimer Straße 82  
69123 Heidelberg, Germany  
Tel.: +49 (0)6221 701 607  
Fax: +49 (0)6221 701 724  
Email: [knx.marketing@de.abb.com](mailto:knx.marketing@de.abb.com)

**Additional information and regional  
points of contact:**

[www.abb.de/knx](http://www.abb.de/knx)  
[www.abb.com/knx](http://www.abb.com/knx)

---

© Copyright 2019 ABB. We reserve the right to make technical changes or modify the contents of this document without prior notice. The agreed properties are definitive for any orders placed. ABB AG does not accept any responsibility whatsoever for potential errors or possible lack of information in this document. We reserve all rights in this document and in the subject matter and illustrations contained therein. Reproduction, transfer to third parties or processing of the content – including sections thereof – is not permitted without the prior written consent of ABB AG.

